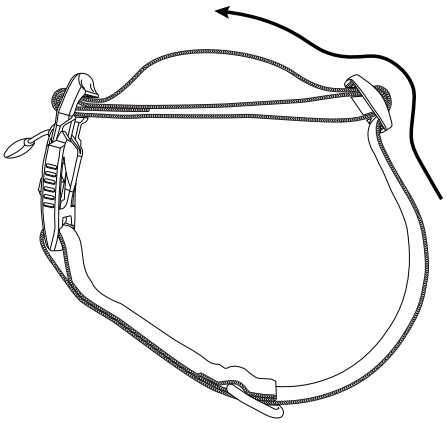
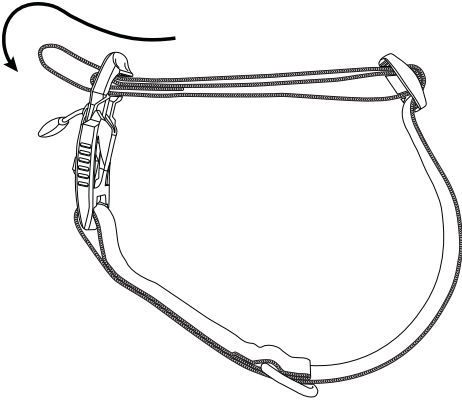
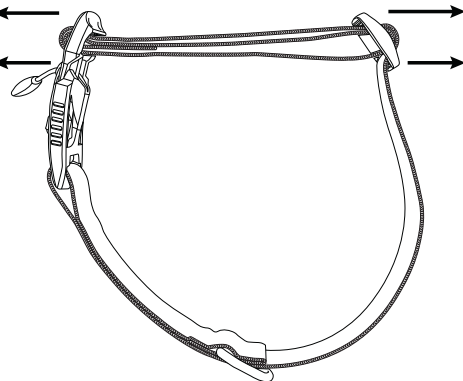





Summit Collar Adjustment Instructions

Your new Summit Collar comes with a double-pass adjustment. Using a double-pass keeps the adjustment from slipping and allows for more available space on customized collars. To more easily adjust your collar, follow the instructions below. If you have any questions or difficulty please reach out to us at contact@modernicon.us

TO TIGHTEN THE COLLAR:

STEP 1	STEP 2	STEP 3
		
<p>Feed the outer layer of webbing through the adjustment slide HALF of the distance desired to shorten.</p> <p>TIP: Hold the plastic adjustment slide in one hand (without obstructing the webbing) and with the other hand pull up on the outermost layer of webbing until the adjustment slide is in the desired position.</p>	<p>Feed the slack (created in step 1) through the adjustment buckle. Note that only the outermost layer of webbing should form a loop.</p> <p>TIP: Pinch the webbing close to the buckle and push outward, while wiggling, to get the loop started.</p>	<p>Hold the buckle in one hand and the plastic adjustment slide in the other hand (without obstructing the webbing in either hand). Pull both hands until the webbing is taut.</p> <p>TIP: The webbing will lay flat once placed on the neck. If further adjustments need to be made, sometimes adjust out (loosening) is easier.</p>

TO LOOSEN THE COLLAR:

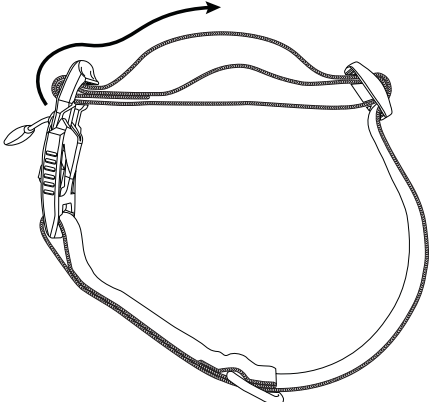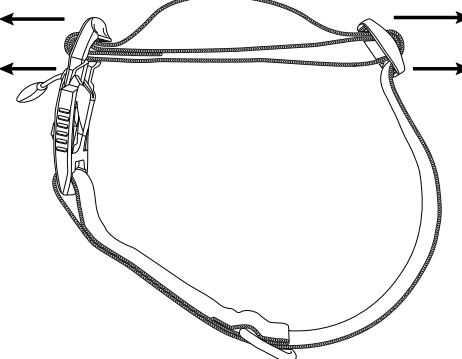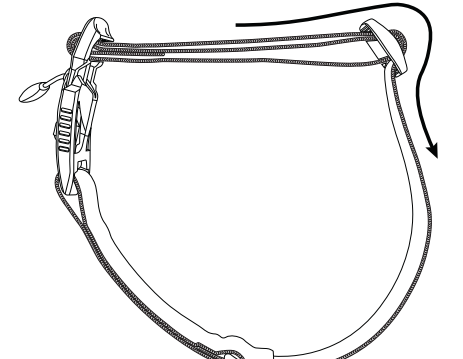STEP 1	STEP 2	STEP 3
		
<p>Feed the bottom layer of webbing through the buckle the total amount desired to lengthen.</p> <p>TIP: Hold the buckle in one hand (without obstructing the webbing) and with the other hand pull up on the outermost layer of webbing until the desired amount of webbing is pulled. Note this will form an arch on the outer and middle pieces of webbing</p>	<p>Hold the buckle in one hand and the plastic adjustment slide in the other hand (without obstructing the webbing in either hand). Pull both hands until the middle webbing is taut. Note the outer layer of webbing will still have an arch.</p>	<p>Feed the outer layer of webbing through the plastic adjustment slide until taut.</p> <p>TIP: Hold the plastic adjustment slide in one hand (without obstructing the webbing in either hand). Pull the single layer of webbing (on the right, d-ring, side) until the outer webbing is taut.</p>